


Easy-On FFC/FPC Connectors, 0.50/1.00mm Pitch, Slider Series

molex


The Easy-On FFC/FPC Connectors, 0.50/1.00mm Pitch, Slider Series, with their market proven 'Slider' locking mechanism and wide circuit options in top, bottom and vertical contact variations, offer design flexibility for FFC/FPC cable routing applications

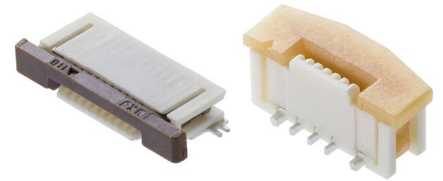

Right-Angle

Vertical

Features and Advantages

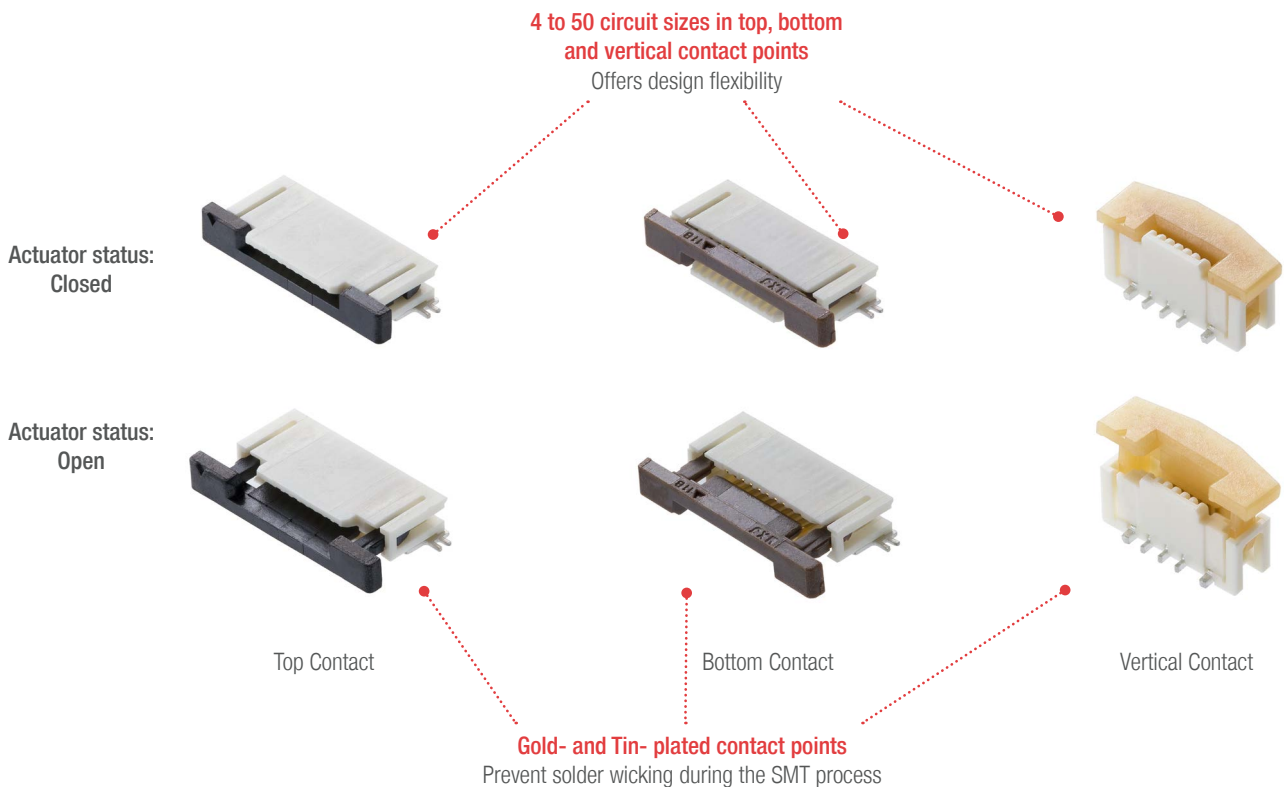

Applications

Industry

- IoT interconnection devices
- Smart speakers
- UAVs (Drones)
- FA robots
- Security cameras

Mobile

- POS terminals

Consumers

- Home appliances

Medical

- Patient monitoring
- MRI/CT machines
- Disposable inspection devices



POS terminal



Medical



IoT device

Easy-On FFC/FPC Connectors, 0.50/1.00mm Pitch, Slider Series

molex

Specifications

REFERENCE INFORMATION

Packaging: Embossed Tape and Reel
Use With: FFC/FPC
Designed In: Millimeters
RoHS: Yes

ELECTRICAL

Voltage (max.): 50V
Current (max.): 0.5A per circuit
Contact Resistance (max.): 20 milliohms
Dielectric Withstanding Voltage: 250V AC
Insulation Resistance (min.): 50 Megohms

MECHANICAL

FFC/FPC Thickness: 0.30mm
Durability (max.): 20 cycles

PHYSICAL

Housing: LCP, UL 94V-0
Actuator: PA, UL 94V-0
Contact: Copper Alloy
Plating:
Contact Area — Gold
Solder Tail Area — Gold
Underplating — Nickel
Fitting Nail: Copper Alloy, Tin over Nickel plating
Operating Temperature: -40 to +85°C

CIRCUIT SIZES

4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18,
19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31,
32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44,
45, 50

Dimensions

Refer to molex.com for detail dimension

Ordering Information

Series No.	Pitch (mm)	Orientation	Contact Position	Circuits	Operating Temperature	Plating
52745-**33	0.50	Right-Angle	Top	4 to 20	-40 to +85°C	New Tin
52745-**97	0.50	Right-Angle	Top	4 to 20	-40 to +85°C	Gold
52746-**33	0.50	Right-Angle	Bottom	4 to 20	-40 to +85°C	New Tin
52746-**71	0.50	Right-Angle	Bottom	4 to 20	-40 to +85°C	Gold
52435-**33	0.50	Right-Angle	Top	21 to 30	-40 to +85°C	New Tin
52435-**71	0.50	Right-Angle	Top	21 to 30	-40 to +85°C	Gold
52437-**33	0.50	Right-Angle	Bottom	21 to 30	-40 to +85°C	New Tin
52437-**71	0.50	Right-Angle	Bottom	21 to 30	-40 to +85°C	Gold
54104-**33	0.50	Right-Angle	Top	30 to 50	-40 to +85°C	New Tin
54104-**31	0.50	Right-Angle	Top	30 to 50	-40 to +85°C	Gold
54132-**33	0.50	Right-Angle	Bottom	30 to 50	-40 to +85°C	New Tin
54132-**62	0.50	Right-Angle	Bottom	30 to 50	-40 to +85°C	Gold
52559-**34	0.50	Vertical	Vertical	6 to 42	-40 to +85°C	New Tin
52559-**52	0.50	Vertical	Vertical	6 to 42	-40 to +85°C	Gold
52207-**33	1.00	Right-Angle	Top	3 to 34	-40 to +85°C	New Tin
52207-**60	1.00	Right-Angle	Top	3 to 34	-40 to +85°C	Gold
52271-**79	1.00	Right-Angle	Bottom	4 to 30	-40 to +85°C	New Tin
52271-**69	1.00	Right-Angle	Bottom	4 to 30	-40 to +85°C	Gold
52610-**33	1.00	Vertical	Vertical	5 to 30	-40 to +85°C	New Tin
52610-**72	1.00	Vertical	Vertical	5 to 30	-40 to +85°C	Gold

Replace ** with circuit size

www.molex.com/link/easyon.html

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.