

PI-410B/BG

Product selector:

PL-410B	GPS L1 version
PL-410BG	GPS/GLONASS version

Specification:

Frequency	GPS (1575.42 MHz)/GLONASS (1592 - 1610 MHz)
Impedance	50 Ohms
Polarization	RHCP
LNA Gain	26dB at 3V, 28dB at 5V
VSWR	<1.2: 1
Voltage supply	2.7V - 5.5V
Current	15mA - 25mA
Power (max.)	138mW
Operating temperature	-40°C to +85°C

Mounting:

Trough hole	10.5mm
-------------	--------

Connection:


Connector type	upon request
Cable length	upon request
Cable type	RG174U

Dimensions:

Max diameter	41mm
Max height	19mm



Gain at 3V

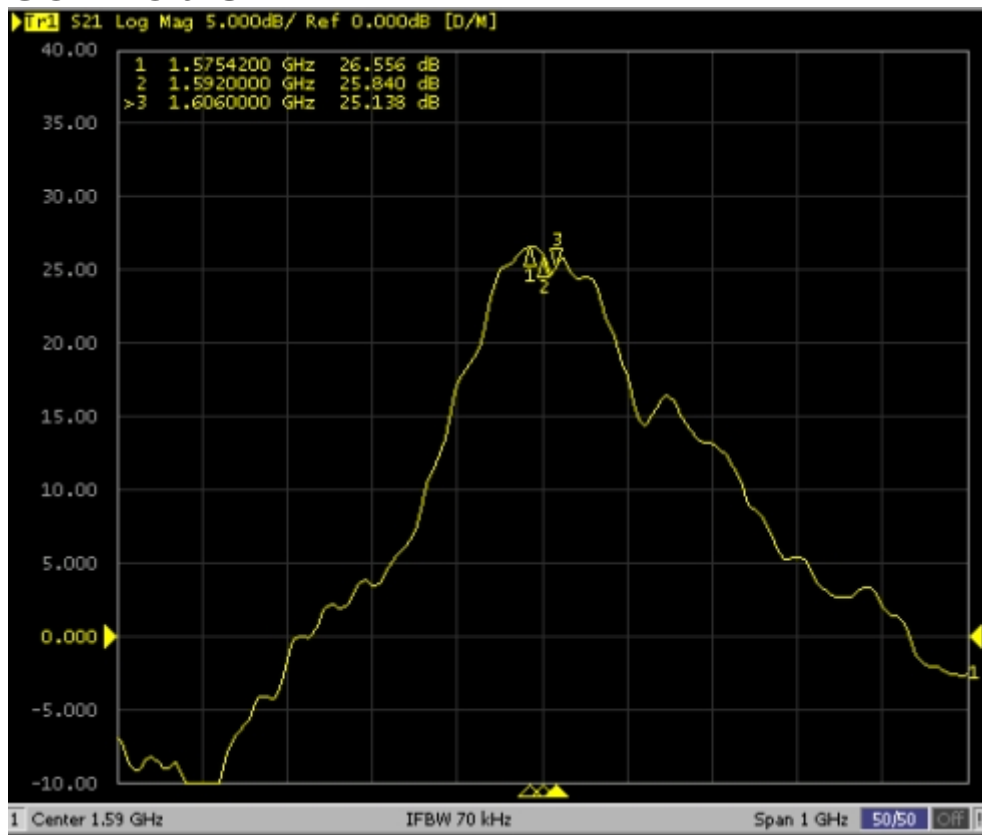

Gain at 5V

