Paoli

reference PL550

mounting position	**ON GLASS / PLASTIC**
nominal impedance	**50 Ohms**
frequency	**AMPS 824-894MHz / GSM 900, 1800 MHz PCN 1,9GHz / UMTS 2,1GHz/ Bluetooth 2,4GHz**
polarisation	**VERTICAL**
gain	**3 dBi**
vswr	**<2:1**
power handling	**25W**
cable	**2.5m RG174**
connector	**FME Female**
housing size	**72 mm x 25mm x 4,7 - 6,3mm**
working temperature	**-40°C to +85°C**

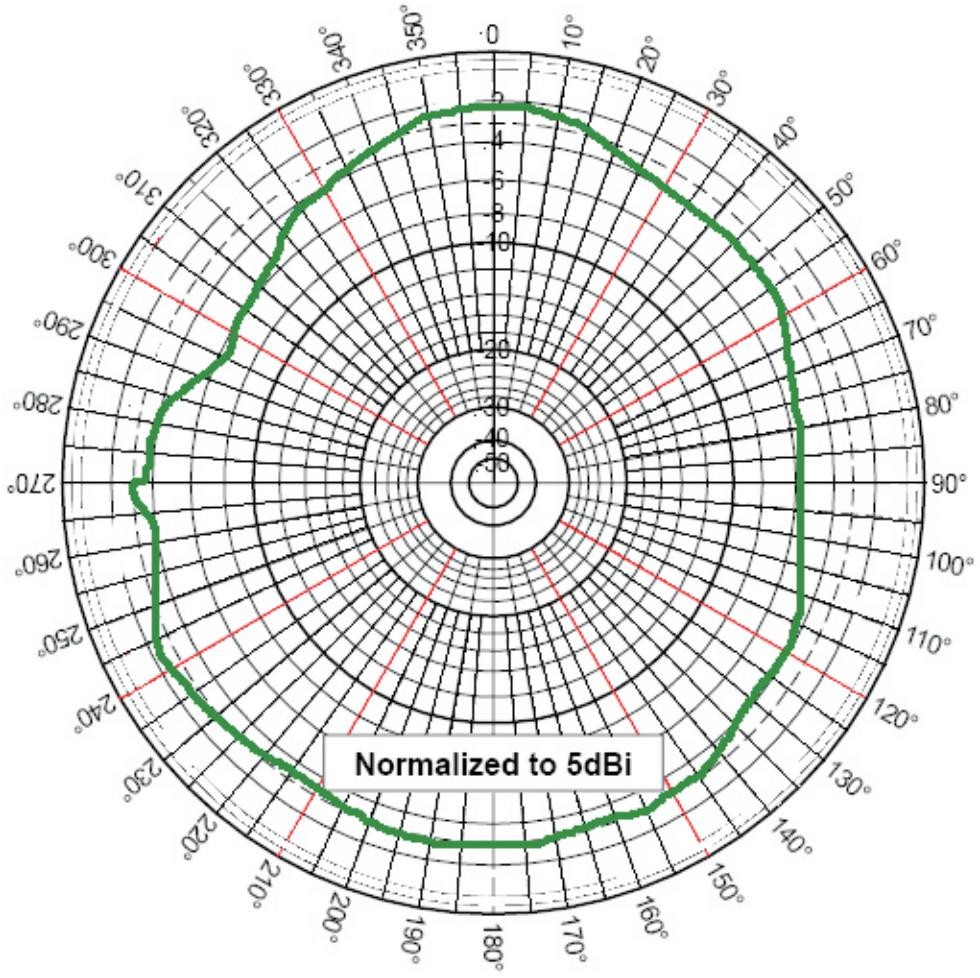

Azimuthal Pattern (X, Y or E-Plane)

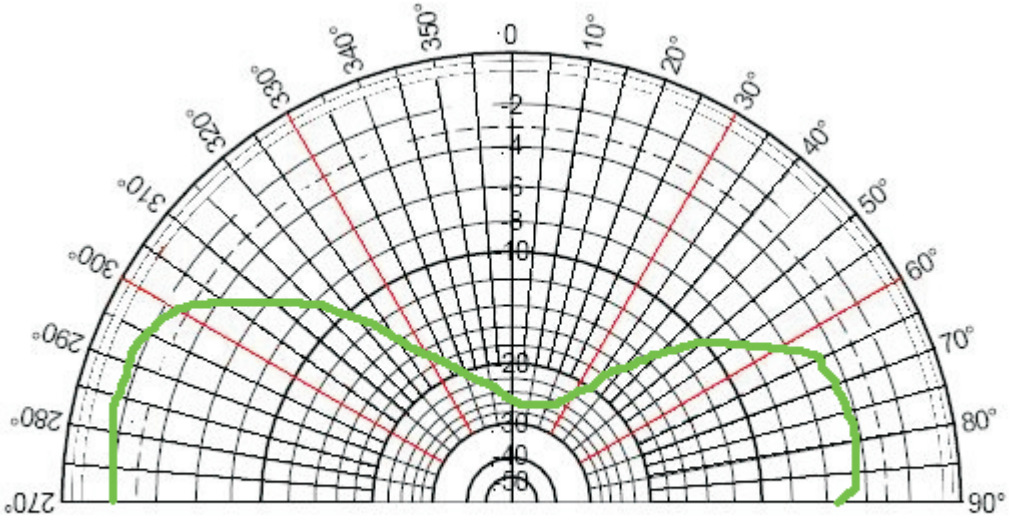

Elevation Pattern (Z, Y or H-Plane)

900 MHz

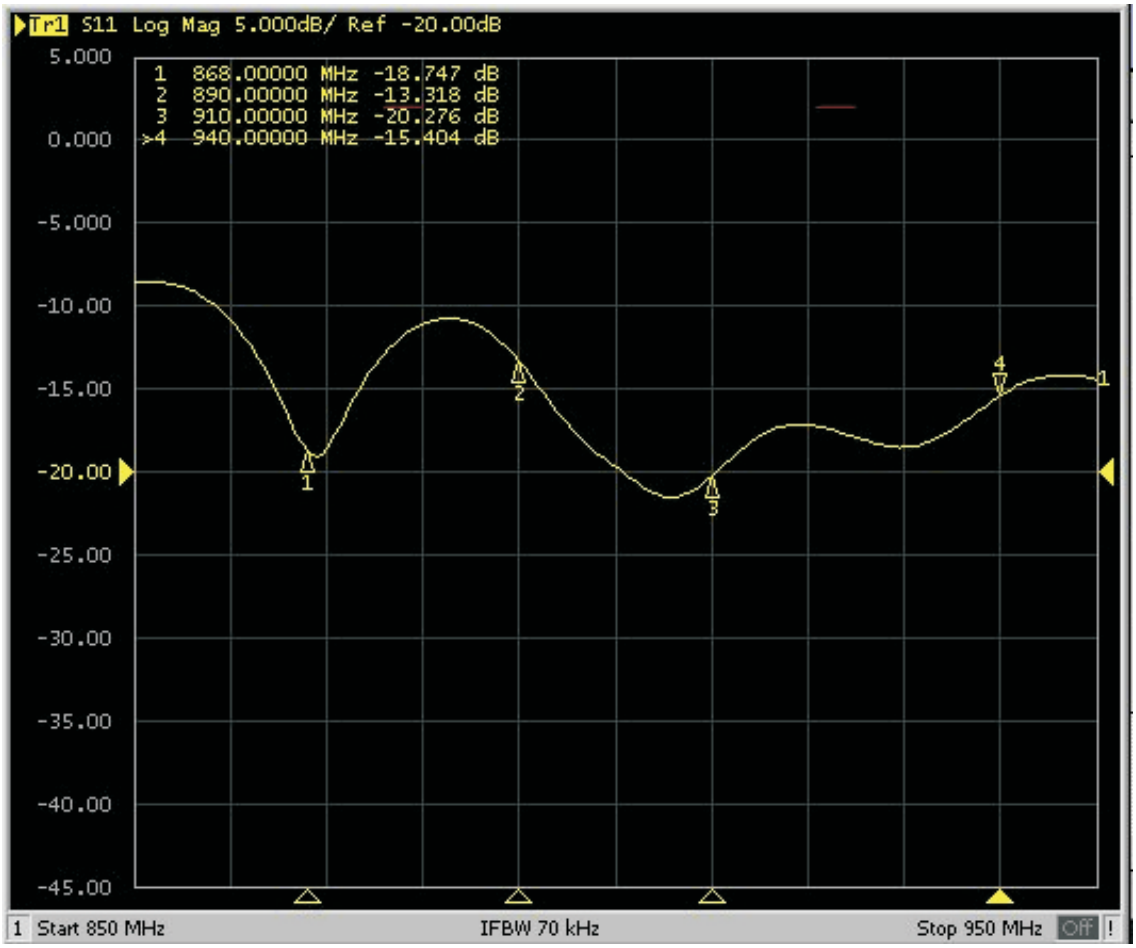

1800/1900 MHz

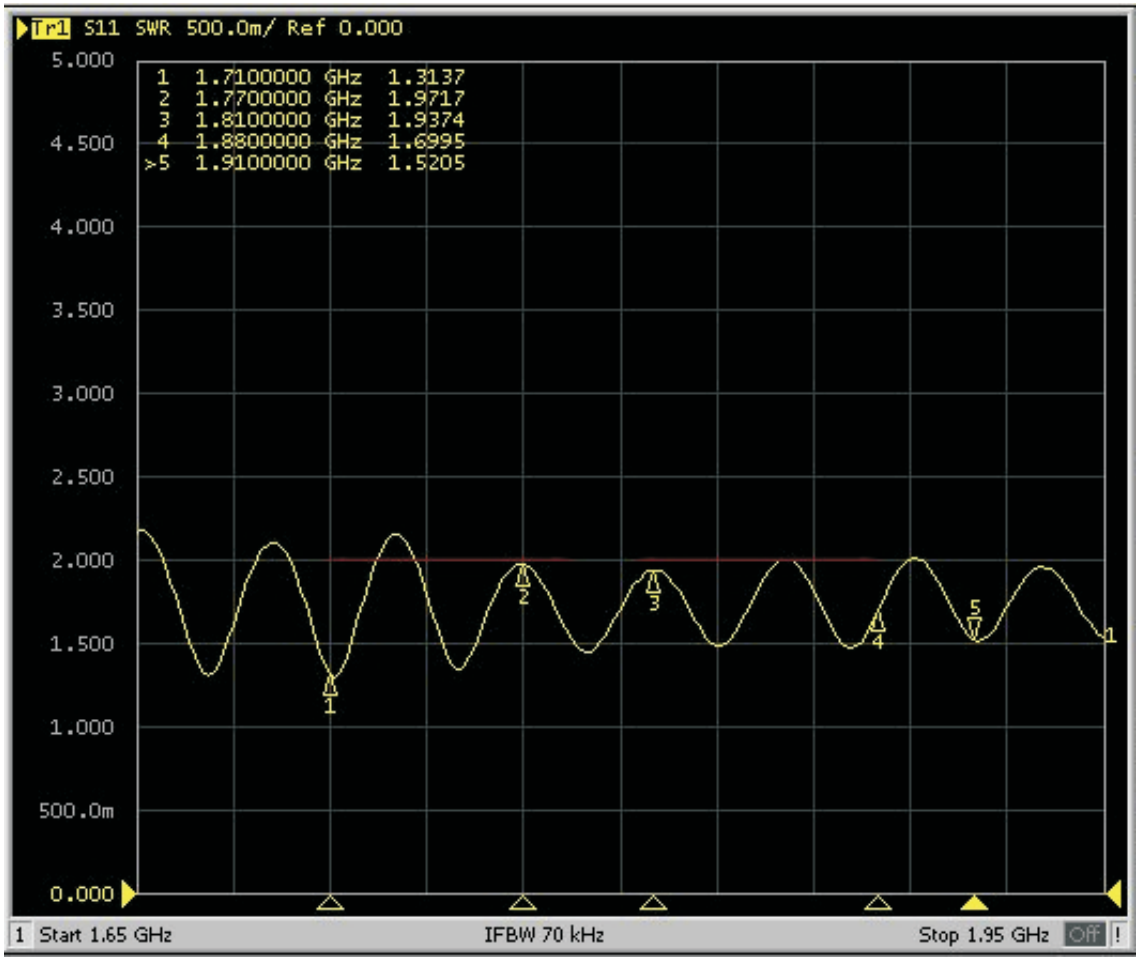

2100 MHz

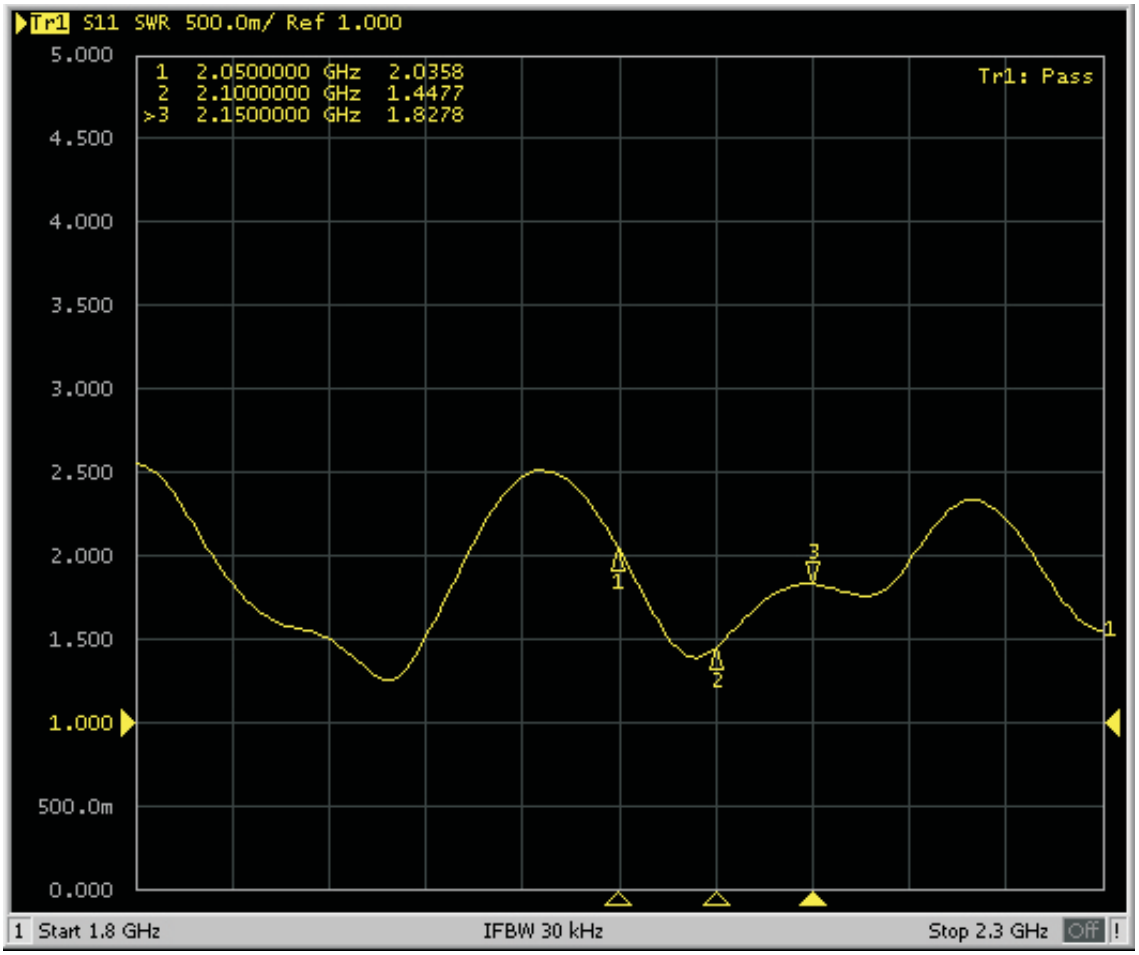
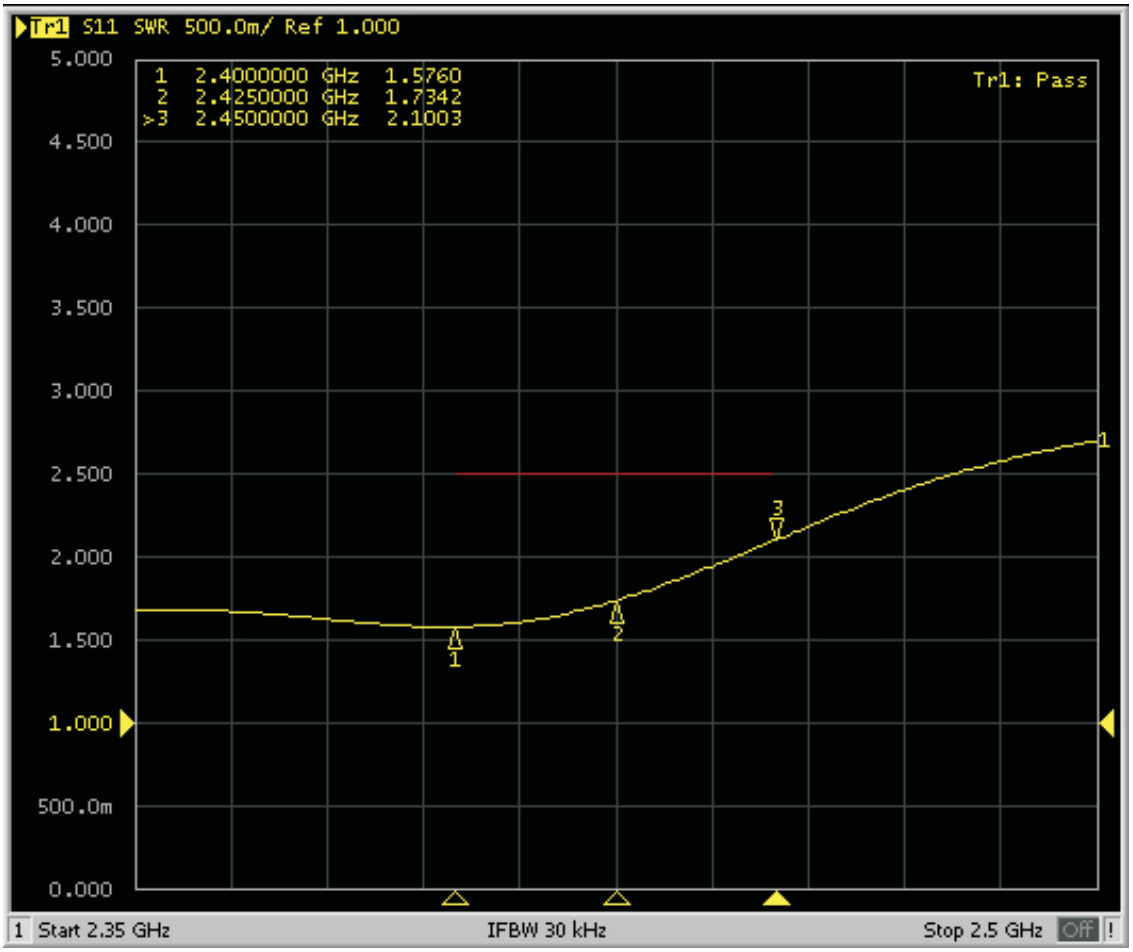
2400 MHz